



doucette
industries, inc



Item # AC 160-2(C), AC Series Mechanically Cleanable Desuperheaters (5 to 200 tons)

Heats Hot Water Utilizing Waste Heat from Refrigeration,
Air Conditioners and Heat Pump Systems

The Doucette AC Series Substantially Reduces Your Hot
Water Heating Costs

- Heats potable water up to 140 °F using waste heat
- Typical Payback Period of Two Years or Less
- Reduces A/C operating costs 5% to 10%
- Mechanical Cleanable Counterflow Design
- Compact and Ready to Install
- Works with All Major Manufacturers' Systems

The Doucette AC Series™ heat recovery unit delivers substantial energy savings by heating potable water by recovering waste heat from refrigeration, air conditioning and heat pump systems. The AC Series™ can effectively heat water up to 140°F, and is ideal for systems ranging from 5 - 200 HP using reciprocating, scroll and screw compressors. The unit arrives as a standard factory package that is ready to install, and can be applied to both air- and water-cooled systems using.

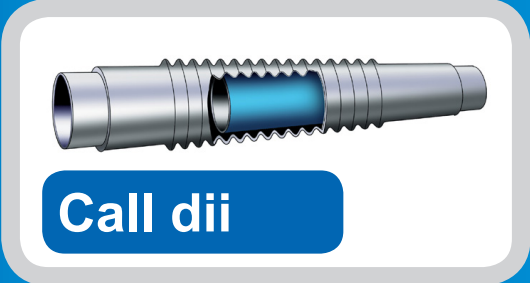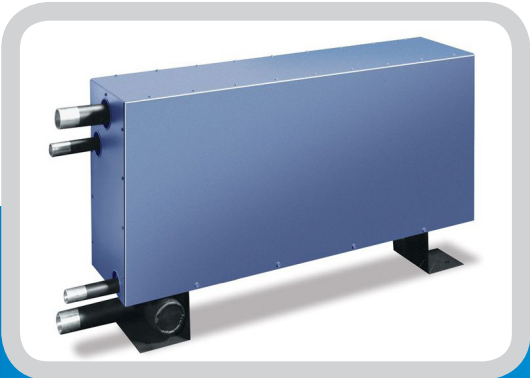

Call dii

Specifications

TR	160 tons	
Typical Applications	<ul style="list-style-type: none"> • Domestic Hot Water • Heating • Process Water Heating • Space Heating • Pool Heating • Hot Deck Reheat • Sub-Soil Heating 	<ul style="list-style-type: none"> • Restaurants • Hotels/Motels • Hospitals • Schools • Food Processing • Ice Rinks • Dormitories



20 Leigh Drive,
York, Pennsylvania 17406-8474



Website: www.doucetteindustries.com



Phone: 717-845-8746
Toll-free: 800-445-7511
Fax: 717-845-2864



Commercial/Industrial: AdamM@doucetteindustries.com
Residential/Light Commercial: AdamM@doucetteindustries.com



# Circuits	2
Cleanability	Mechanical
Refrig. Conn.	2 5/8" OD
Water Conn.	2 5/8" OD
Length	52 1/2 "
Width	34 3/4 "
Height	25-13/16 "
Weight	1100 lbs

Mechanical Specifications	
Optional Pump	Grundfos UP43-75BF, Circulating Pump (\$1,630.00)
Heat Exchanger	Mechanically cleanable, vented double wall, U.L. & USDA Listed, 450 psig side DWP shell (optional 600 psig), 300 psig tube side DWP with removable cleanout fittings
Cabinet	20 Gauge, 0.040" painted aluminum with removable back panel and 1" fiberboard insulation.



20 Leigh Drive,
York, Pennsylvania 17406-8474



Phone: 717-845-8746
Toll-free: 800-445-7511
Fax: 717-845-2864




Website: www.doucetteindustries.com



Commercial/Industrial: AdamM@doucetteindustries.com
Residential/Light Commercial: AdamM@doucetteindustries.com



Network User, Doucette Industries 1/29/2014 9:23 AM 96118.dwg

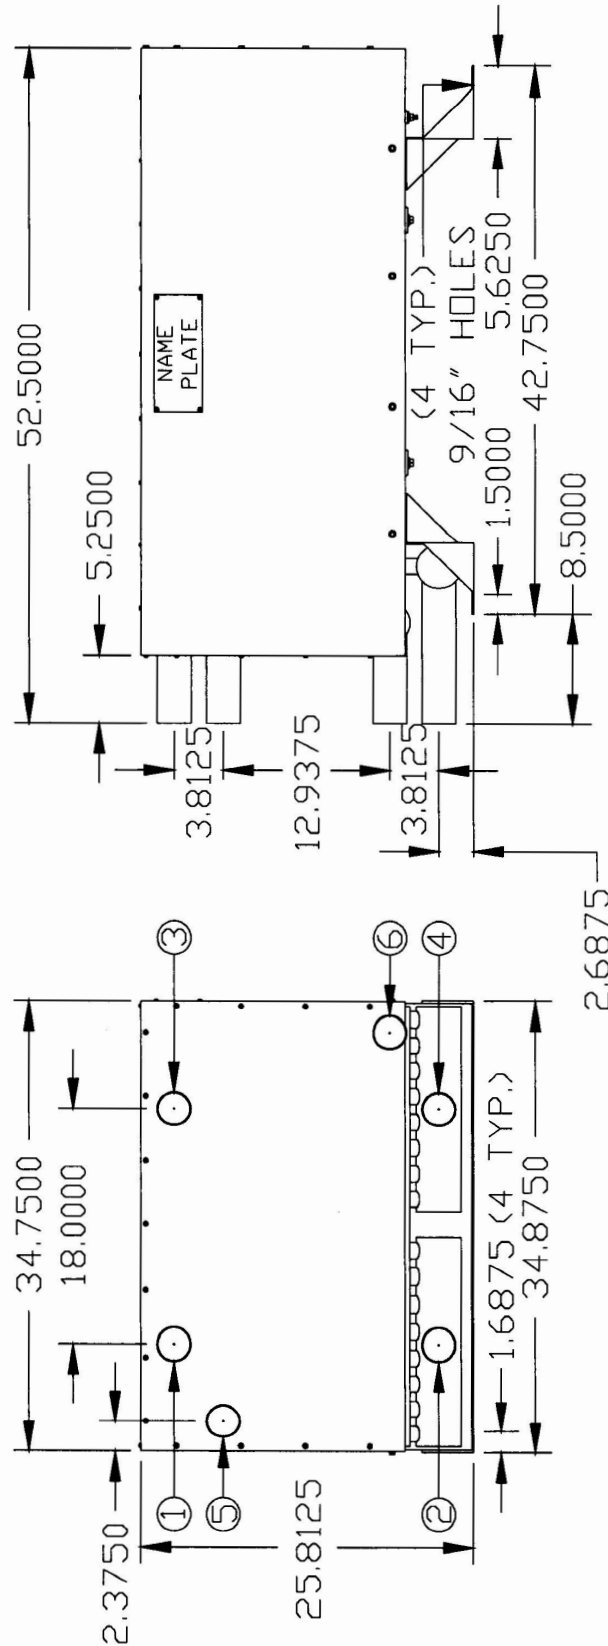

DESIGN PRESSURE:
SHELLSIDE 450PSIG
TUBESIDE 300PSIG

TOLERANCES	DOUCETTE INDUSTRIES, INC.	
DECIMAL	SCALE	DRAWN BY: MLB
± .125	.078125	APP. BY: RJR
FRACTIONAL	TITLE	AC 160-2 (C) HP DRC
±	DATE	3/9/99
ANGULAR	DRAWING NUMBER	96118
±	ALL DIMENSIONS INCHES, UNLESS SPECIFIED	
GAUGE 20		

CONNECTIONS:

1.) REFRIGERANT SUPPLY, #1	2-5/8"	DD	COPPER	SWEAT
2.) REFRIGERANT RETURN, #1	2-5/8"	DD	COPPER	SWEAT
3.) REFRIGERANT SUPPLY, #2	2-5/8"	DD	COPPER	SWEAT
4.) REFRIGERANT RETURN, #2	2-5/8"	DD	COPPER	SWEAT
5.) WATER RETURN	2-5/8"	DD	COPPER	SWEAT
6.) WATER SUPPLY	2-5/8"	DD	COPPER	SWEAT

47.25 X 34.75 X 20.5



20 Leigh Drive,
York, Pennsylvania 17406-8474



Phone: 717-845-8746
Toll-free: 800-445-7511
Fax: 717-845-2864



Website: www.doucetteindustries.com



Commercial/Industrial: AdamM@doucetteindustries.com
Residential/Light Commercial: AdamM@doucetteindustries.com